

DLC Display Co., Limited

德爾西顯示器有限公司



MODEL No: DLC0122AZS-2

TEL: 86-755-86029824

FAX: 86-755-86029827

E-MAIL: sales@dlcdisplay.com

WEB: www.dlcdisplay.com

Record of Revision

| Date | Revision No. | Summary |
|------------|--------------|-----------------------|
| 2016-07-19 | 1.0 | Rev 1.0 first issue. |
| 2016-08-16 | 1.1 | Update the BL and FPC |
| | | |

1. Scope

This data sheet is to introduce the specification of DLC0122AZS-2 active matrix TFT module. It is composed of a color TFT-LCD panel, driver IC, FPC and a backlight unit. The 1.22" display area contains 240(RGB) x 204 pixels.

As to basic specification of the driver IC, refer to the IC (ST7789V) specification and datasheet.

2. Application

Digital equipments which need color display, mobile phone, mobile navigator/video systems.

3. General Information

| Item | Contents | Unit |
|-------------------------------|------------------------|------|
| Size | 1.22 | inch |
| Resolution | 240(RGB) x 204 | |
| Interface | SPI | |
| Technology type | IPS | |
| Pixel pitch | / | mm |
| Pixel Configuration | R.G.B. Vertical Stripe | |
| Outline Dimension (W x H x D) | 33.66 x 33.02 x 1.30 | mm |
| Active Area | 30.96 x 26.32 | mm |
| Display Mode | Transmissive | |
| Backlight Type | LED | |
| Driver IC | ST7789 | |
| Weight | TBD | g |

4. Outline Drawing

Dimensions:
 33.66, 33.36, 14.39, 11.81, 10.92, 0.99, 13.40, 10.43, 31.92, 33.02, 14.50, 1.30±0.1, 0.3±0.03

Notes:
 1. DISPLAY TYPE: 1.22" TFT, TRANSMISIVE
 2. DRIVER IC: ST7789
 3. CONNECTOR: COG
 4. VIEWING DIRECTION: 6'CLOCK
 5. OPERATING TEMPERATURE: -20°C-+70°C.
 6. STORAGE TEMPERATURE: -30°C-+80°C.
 7. BACKLIGHT TYPE: 2 WHITE LEDS.
 8. LED: If=15mA(CONSTANT CURRENT).
 9. (,.) REFERENCE DIMENSION.
 10. "ICON MEAN CRITICAL DIM
 11. MUST MEET THE REQUIREMENT OF ROHS

FPC INTERFACE

| No. | Symbol |
|-----|---------|
| 1 | LEDK1 |
| 2 | LEDK2 |
| 3 | GND |
| 4 | GND |
| 5 | FMARK |
| 6 | SDA |
| 7 | A0 |
| 8 | SCLK |
| 9 | CS |
| 10 | RESFT |
| 11 | IOVCC18 |
| 12 | IOVCC18 |
| 13 | VCC28 |
| 14 | VCC28 |
| 15 | GND |
| 16 | GND |
| 17 | NC |
| 18 | NC |
| 19 | NC |
| 20 | NC |
| 21 | NC |
| 22 | NC |
| 23 | LEDA |
| 24 | LEDA |

Notes:
 If=15mA(type)
 Vf=3.2(max)

Notes:
 A, K1, K2

Notes:
 connector part number: DF37B-24DP-0.4V

Notes:
 (0.000) (LCD AA)
 R15.48 (LCD AA)

Notes:
 www.dlcdisplay.com

Notes:
 TITLE: DLC0122AZS-2
 SCALE:
 UNIT: mm
 DWG NO:
 DWG NAME:
 SHEET NO: OF

Notes:
 DRAWN BY:
 CHECKED BY:
 APPROVED BY:
 CONFIRMED BY:

Notes:
 DLC Display Co., Limited

5. Interface signals

| NO. | I/O | SYMBOL | DISCRIPTION |
|-------|-----|---------|--|
| 1 | P | LEDK1 | Cathode pin of backlight |
| 2 | P | LEDK2 | Cathode pin of backlight |
| 3 | P | GND | Ground |
| 4 | P | GND | Ground |
| 5 | - | FMARK | Frame head pulse signal |
| 6 | I/O | SDA | Data Input |
| 7 | I | A0 | Data/Command selection pin |
| 8 | I | SCLK | Serial interface Clock |
| 9 | I | CS | Chip select input pin ("Low" enable) |
| 10 | I | RESET | This signal will reset the device and must be applied to properly initialize the chip. Signal is active low. |
| 11 | P | IOVCC18 | Power voltage for logic(1.8V) |
| 12 | P | IOVCC18 | Power voltage for logic(1.8V) |
| 13 | P | VCC28 | Supply voltage(2.8V) |
| 14 | P | VCC28 | Supply voltage(2.8V) |
| 15 | P | GND | Ground |
| 16 | P | GND | Ground |
| 17-22 | - | NC | NC |
| 23 | P | LEDA | Anode pin of backlight. |
| 24 | P | LEDA | Anode pin of backlight. |

Connector: DF37B-24DP-0.4V

6. Absolute maximum Ratings

6.1. Electrical Absolute max. ratings

GND=0V, Ta=25°C

| Parameter | Symbol | MIN | MAX | Unit | Remark |
|----------------------------|--------|------|-----------|------|--------|
| Supply voltage | VCC | -0.3 | +4.6 | V | |
| Power voltage for logic | IOVCC | -0.3 | +4.6 | V | |
| Logic input voltage range | VIN | -0.3 | IOVCC+0.3 | V | |
| Logic output voltage range | VOOUT | -0.3 | IOVCC+0.3 | V | |

6.2. Environment Condition

| Item | Symbol | MIN | MAX | Unit | Remark |
|-----------------------|--------|-----|-----|------|--------|
| Operating Temperature | TOPR | -20 | 70 | °C | |
| Storage Temperature | TSTG | -30 | 80 | °C | |


7. Electrical Specifications

7.1. Electrical characteristics

Ta=25°C

| Parameter | Symbol | MIN | Typ | MAX | Unit | Remark |
|------------------------------|--------|------|-----|-----|------|------------|
| Supply voltage | VCC | 2.5 | 2.8 | 3.3 | | |
| Power voltage for logic | IOVCC | 1.65 | 1.8 | 3.3 | V | |
| Supply current for LCM | ILCD | -- | 8 | -- | mA | VCC = 2.8V |
| Supply voltage for backlight | VLED | 5.8 | 6.4 | 7 | V | |
| Supply current for backlight | ILED | -- | 15 | -- | mA | |

7.2. Block diagram

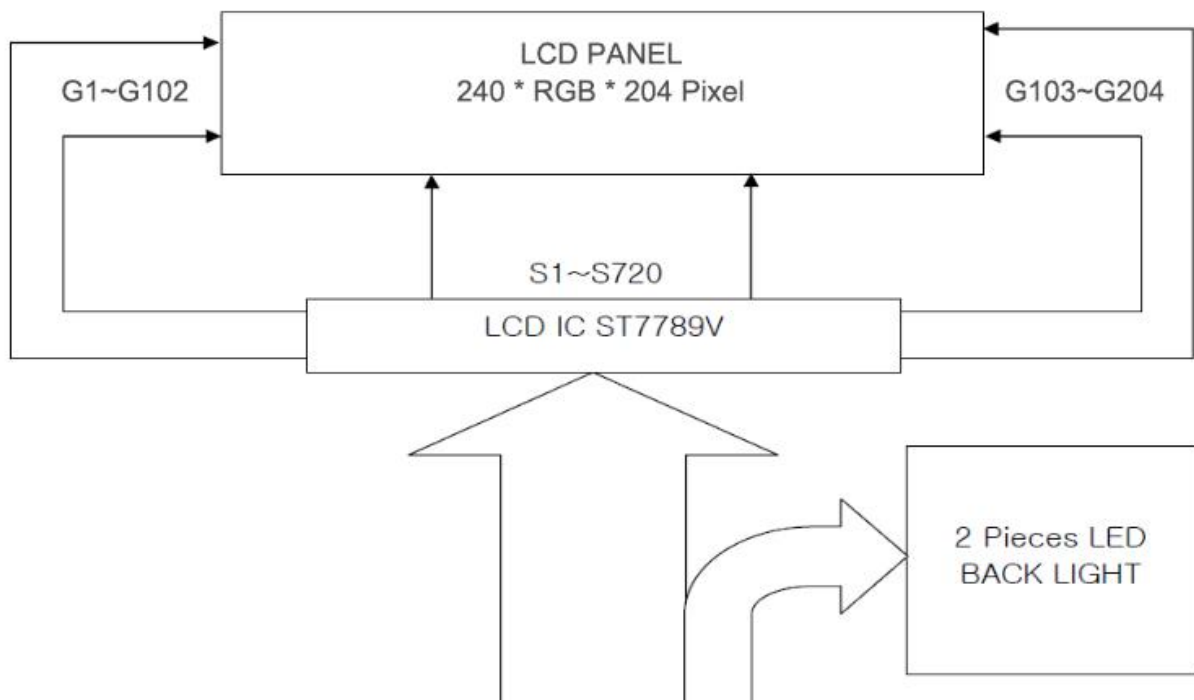


8. Optical Specification

Ta=25°C

| Item | Symbol | Condition | Min | Typ. | Max. | Unit | Remark |
|----------------|------------|------------------|------------------|------|------|-------------------|-----------------|
| Contrast Ratio | CR | $\theta=0^\circ$ | -- | 800 | -- | | Note1 Note2 |
| Response Time | Tr/ Tf | 25°C | -- | 30 | 40 | ms | Note1 Note3 |
| View Angles | θT | $CR \geq 10$ | -- | 80 | -- | Degree | Note 4 |
| | θB | | -- | 80 | -- | | |
| | θL | | -- | 80 | -- | | |
| | θR | | -- | 80 | -- | | |
| Chromaticity | White | x | Brightness is on | -- | TBD | -- | Note5, Note1 |
| | | y | | -- | TBD | -- | |
| NTSC | S | | -- | 50 | -- | % | Note5 |
| Luminance | L | | -- | 300 | -- | cd/m ² | Note1 Note6 |
| Uniformity | U | | 75 | 80 | -- | % | Note1 Note7 |

Note 1: Definition of optical measurement system.

Temperature = 25°C(±3°C); LED back-light: ON, Environment brightness < 150 lx

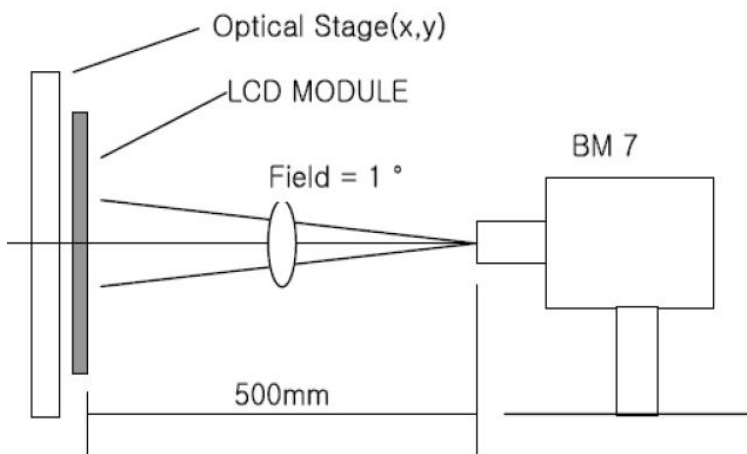


Note 2: Contrast ratio is defined as follow:

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$


Note 3: Response time is defined as follow:

Response time is the time required for the display to transition from black to white (Rise Time, T_r) and from white to black(Decay Time, T_f).

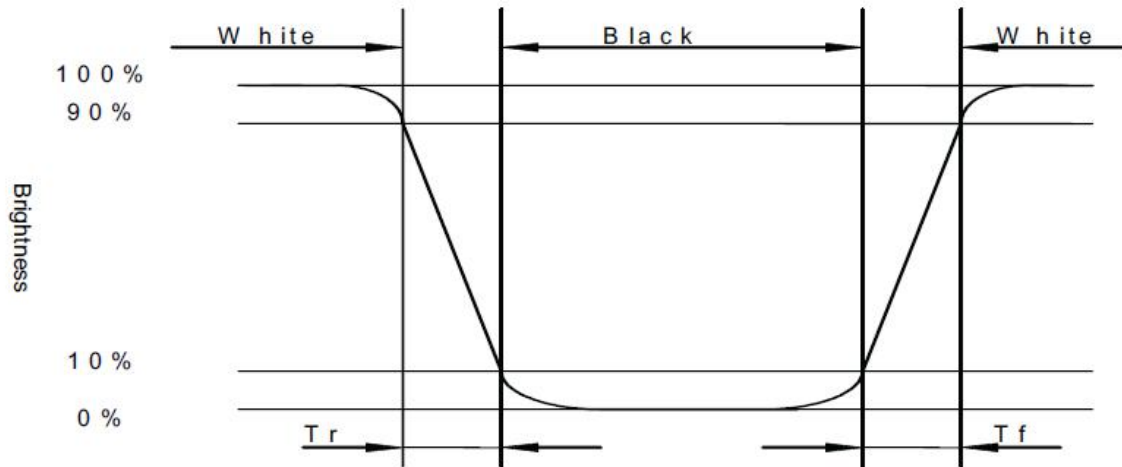


Note 4: Viewing angle range is defined as follow:

Viewing angle is measured at the center point of the LCD.

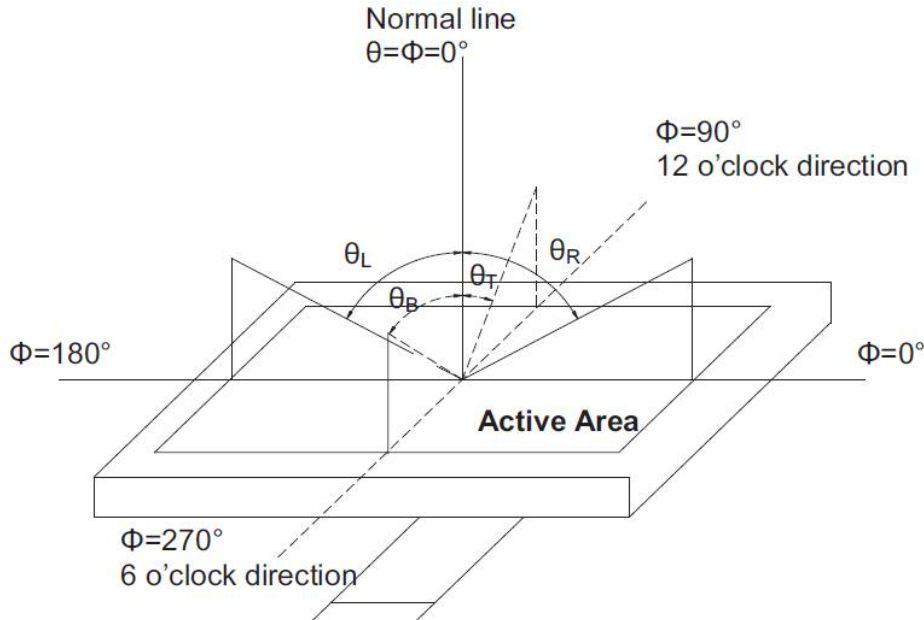

Note 5: Color chromaticity is defined as follow: (CIE1931)

Color coordinates measured at center point of LCD.

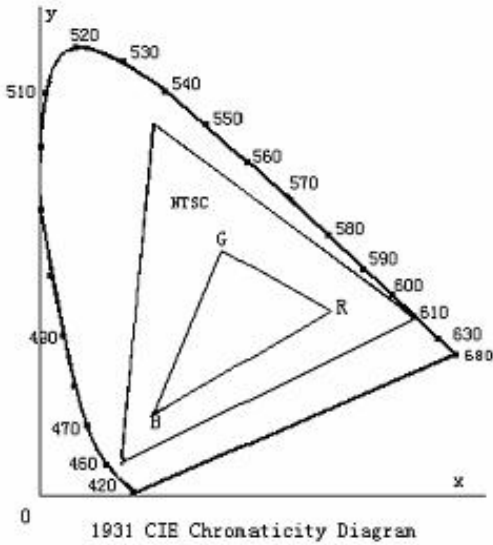

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$

Note 6: Luminance is defined as follow:

Luminance is defined as the brightness of all pixels “White” at the center of display area on optimum contrast.

Note 7: Luminance Uniformity is defined as follow:

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Uniformity (U)} = \frac{\text{Minimum Luminance(brightness) in 9 points}}{\text{Maximum Luminance(brightness) in 9 points}}$$

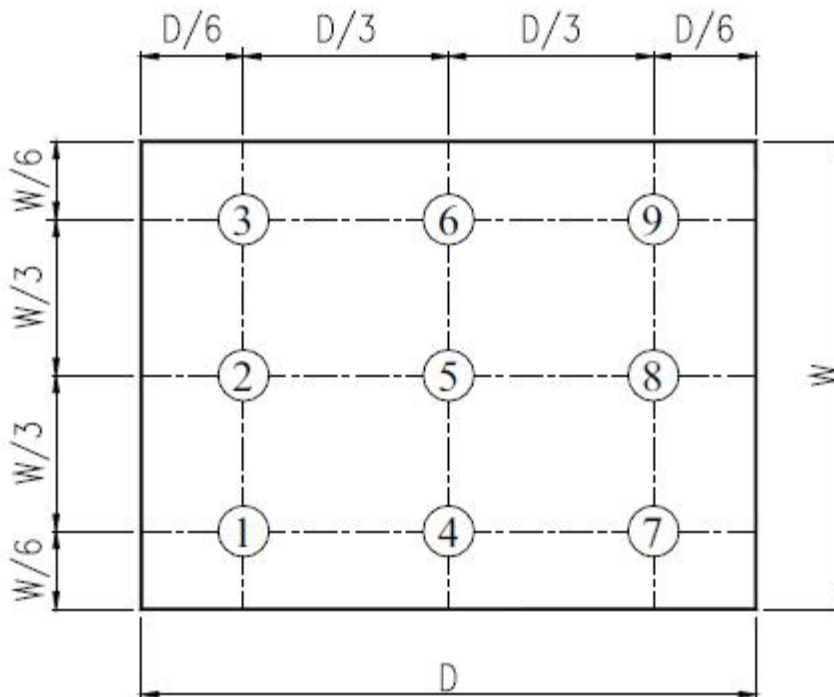


Fig. 2 Definition of uniformity

9. Environmental / Reliability Tests

| No | Test Item | Condition | Judgment criteria |
|----|-----------------------------------|--|---|
| 1 | High Temp Operation | Ts=+70°C, 120hrs | Per table in below |
| 2 | Low Temp Operation | Ta=-20°C, 120hrs | Per table in below |
| 3 | High Temp Storage | Ta=+80°C, 120hrs | Per table in below |
| 4 | Low Temp Storage | Ta=-30°C, 120hrs | Per table in below |
| 5 | High Temp & High Humidity Storage | Ta=+40°C, 90% RH 120 hours | Per table in below (polarizer discoloration is excluded) |
| 6 | Thermal Shock (Non-operation) | -20°C 30 min~+70°C 30 min, Change time:5min, 10 Cycles | Per table in below |
| 7 | ESD (Operation) | C=150pF, R=330Ω, 5points/panel Air:±8KV, 5times; Contact:±4KV, 5 times; | Per table in below |
| 8 | Vibration (Non-operation) | Frequency range:10~55Hz, Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X.Y.Z. | Per table in below |
| 9 | Shock (Non-operation) | 60G 6ms, ±X,±Y,±Z 3times, for each direction | Per table in below |
| 10 | Package Drop Test | Height:80 cm, 1 corner, 3 edges, 6 surfaces | Per table in below |

| INSPECTION | CRITERION(after test) |
|------------------------|---|
| Appearance | No Crack on the FPC, on the LCD Panel |
| Alignment of LCD Panel | No Bubbles in the LCD Panel No other Defects of Alignment in Active area |
| Electrical current | Within device specifications |
| Function / Display | No Broken Circuit, No Short Circuit or No Black line No Other Defects of Display |

10. Precautions for Use of LCD Modules

10.1 Safety

The liquid crystal in the LCD is poisonous. Do not put it in your mouth. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and water.

10.2 Handling

- A. The LCD and touch panel is made of plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
- B. Do not handle the product by holding the flexible pattern portion in order to assure the reliability
- C. Transparency is an important factor for the touch panel. Please wear clear finger sacks, gloves and mask to protect the touch panel from finger print or stain and also hold the portion outside the view area when handling the touch panel.
- D. Provide a space so that the panel does not come into contact with other components.
- E. To protect the product from external force, put a covering lens (acrylic board or similar board) and keep an appropriate gap between them.
- F. Transparent electrodes may be disconnected if the panel is used under environmental conditions where dew condensation occurs.
- G. Property of semiconductor devices may be affected when they are exposed to light, possibly resulting in IC malfunctions.
- H. To prevent such IC malfunctions, your design and mounting layout shall be done in the way that the IC is not exposed to light in actual use.

10.3 Static Electricity

- A. Ground soldering iron tips, tools and testers when they are in operation.
- B. Ground your body when handling the products.
- C. Power on the LCD module before applying the voltage to the input terminals.
- D. Do not apply voltage which exceeds the absolute maximum rating.
- E. Store the products in an anti-electrostatic bag or container.

10.4 Storage

- A. Store the products in a dark place at $+25^{\circ}\text{C} \pm 10^{\circ}\text{C}$ with low humidity (40% RH to 60% RH). Don't expose to sunlight or fluorescent light.
- B. Storage in a clean environment, free from dust, active gas, and solvent.

10.5 Cleaning

- A. Do not wipe the touch panel with dry cloth, as it may cause scratch.
- B. Wipe off the stain on the product by using soft cloth moistened with ethanol. Do not allow ethanol to get in between the upper film and the bottom glass. It may cause peeling issue or defective operation. Do not use any organic solvent or detergent other than ethanol.

10.6 Cautions for installing and assembling

Bezel edge must be positioned in the area between the Active area and View area. The bezel may press the touch screen and cause activation if the edge touches the active area. A gap of approximately 0.5mm is needed between the bezel and the top electrode. It may cause unexpected activation if the gap is too narrow. There is a tolerance of 0.2 to 0.3mm for the outside dimensions of the touch panel and tail. A gap must be made to absorb the tolerance in the case and connector.

